

TD-500


Benchtop low speed centrifuge

Features:

- Brushless motor driving,digital display.
- All-steel body,stainless steel centrifugal chamber.
- Independent motor control ,electric lid lock.
- It can store common procedures and there are 10 levels of acceleration and deceleration for Choice.
- RCF can be directly set up and display, without RPM / RCF translated.
- Speed,RCF,time and temperature parameters of instruments can be modified during operation.

Technical Parameters

Max Speed	5 000 r/min
Max RCF	4 620Xg
Max Capacity	6X50 ml
Speed Accuracy	±30 r/min
Timer Range	1~99min/inching
Noise	≤60dB (A)
Power	AC 220V 50HZ 10A
Dimension	480×390×320(L×W×H)mm
Weight	28 kg

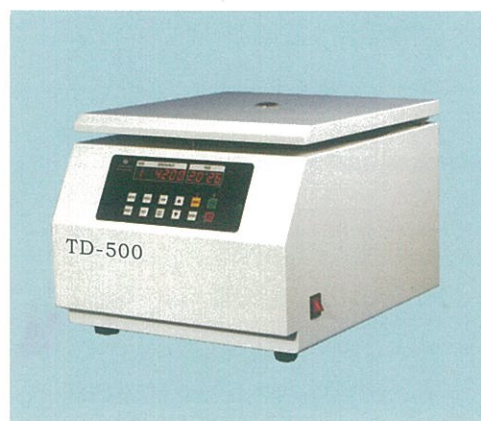

Rotor Technical Data

Rotor	Capacity	Max Speed	Max RCF
NO. 1-1 Angle Rotor	12X15 ml	5 000 rpm	3 550 Xg
NO. 1-2 Angle Rotor	6X50 ml		
NO. 2 Swing-out Rotor	24X7 ml blood collection tube	5 000 rpm	4 000 Xg
NO. 3-1 Swing-out Rotor	16X15 ml	5 000 rpm	4 620 Xg
NO. 3-2 Swing-out Rotor	8X15 ml		
NO. 4 Swing-out Rotor	4X50 ml	4 000 rpm	2 690 Xg

